

# AP-GIC-010A-060


## 1xGE 60W UPoE Injector




### Technical Specifications

<b>Model</b>	AP-GIC-010A-060	<b>PoE Output Power</b>	54VDC/60W
<b>IP Camera Compatibility</b>		<b>802.3at Standard Compatible</b>	Yes
<b>Video Resolution</b>	Megapixel/D1/VGA	<b>802.3af Standard Compatible</b>	Yes
<b>Video Compression</b>	MJPEG/MPEG-4/H.264/H.265	<b>Over Current Protection</b>	Supported
<b>Compatible Camera List</b>	Outdoor Enclosures: AE-241, AE-242 VIVOTEK Network Cameras (FE8180, FD816C-HF2, IP8173H excluded)	<b>Circuit Shorting Protection</b>	Supported
<b>Ethernet</b>		<b>Power Pin Assignment</b>	1/2(-), 3/6(+), 4/5(+), 7/8(-)
<b>Gigabit Ethernet (RJ45)</b>	1	<b>PoE PD Auto Detection</b>	Supported
<b>Standards</b>		<b>General</b>	
<b>IEEE 802.3 10-BASE-T (Ethernet)</b>	Supported	<b>LED Indicators</b>	Power, PoE
<b>IEEE 802.3u 100-BASE-TX (Fast Ethernet)</b>	Supported	<b>Power Input</b>	100~240VAC / 50~60Hz
<b>IEEE 802.3ab 1000-BASE-T (Gigabit Ethernet)</b>	Supported	<b>Power Consumption</b>	65W
<b>IEEE 802.3af Power over Ethernet</b>	Supported	<b>Dimensions</b>	153 (L) x 84 (W) x 44 (H) mm
<b>IEEE 802.3at Power over Ethernet</b>	Supported	<b>Weight</b>	0.4 kg
<b>Transmission Media</b>		<b>Operating Temperature</b>	0°C ~ 50°C (32°F ~ 122°F)
<b>10Base T</b>	Cat. 3, 4, 5 UTP/STP	<b>Storage Temperature</b>	-20°C ~ 70°C (-4°F ~ 158°F)
<b>100Base TX</b>	Cat. 5, 5e UTP/STP	<b>Humidity</b>	Operating: 10~90% (Non-condensing) Storage: 10~90% (Non-condensing)
<b>1000Base T</b>	Cat. 5e, 6, 7 UTP/STP	<b>Safety Certifications</b>	CE, C-Tick, FCC, VCCI, LVD
*It is highly recommended to use standard Cat. 5e/6/7 cables which are compliant with the 3P/ETL standard.		<b>Accessory</b>	
<b>PoE Function</b>		<b>Included Accessories</b>	Power cord, QIG
<b>Number of PoE Out Ports</b>	1		

### Dimensions

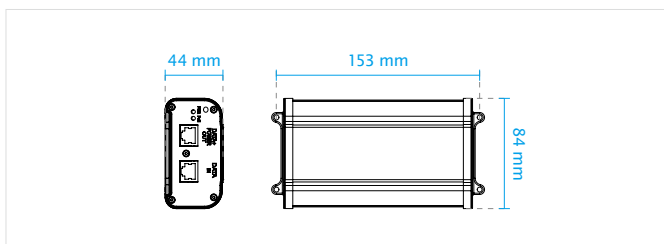

### Application Diagram

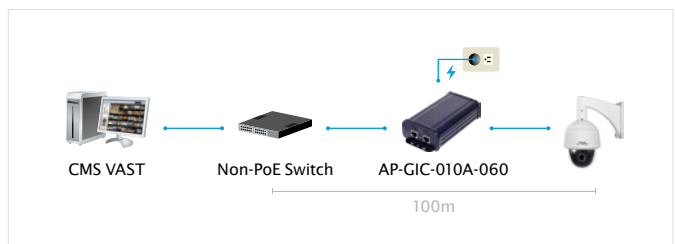

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 7