



FD9171-HT

Fixed Dome Network Camera



3MP · H.265 Compression · Smart Stream II · Bandwidth Saving · WDR Pro · SNV · PIR · P-iris · 30M IR



VIVOTEK's FD9171-HT is a brand-new professional H.265 high-efficiency indoor dome network camera, offering 30 fps @ 3-Megapixels with outstanding image quality. Employing H.265 technology enables the camera to provide higher and more efficient image compression rates than previous H.264 systems. In addition, VIVOTEK's sophisticated Smart Stream II enables the camera to optimize resolution for a desired object or area and therefore to maximize efficiency of bandwidth usage. Combining H.265 and Smart Stream II, the FD9171-HT can reduce both bandwidth and storage consumption up to 80%* while producing image quality of the high standard.

To meet the demands of indoor applications, VIVOTEK's FD9171-HT features a built-in PIR sensor to help detect any unexpected events and to provide real-time responses .


* Depending on scenes

Key Features

- H.265 Compression Technology
- 1/2.8" Progressive CMOS Sensor
- 30 fps @ 2048x1536
- Smart Stream II to Optimize Bandwidth Efficiency
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Built-in IR Illuminators, Effective up to 30 Meters
- Remote Focus for Easy Focus Adjustments
- SNV (Supreme Night Visibility) for Low Light Conditions
- PIR
- Video Rotation for Corridor View
- P-iris Lens

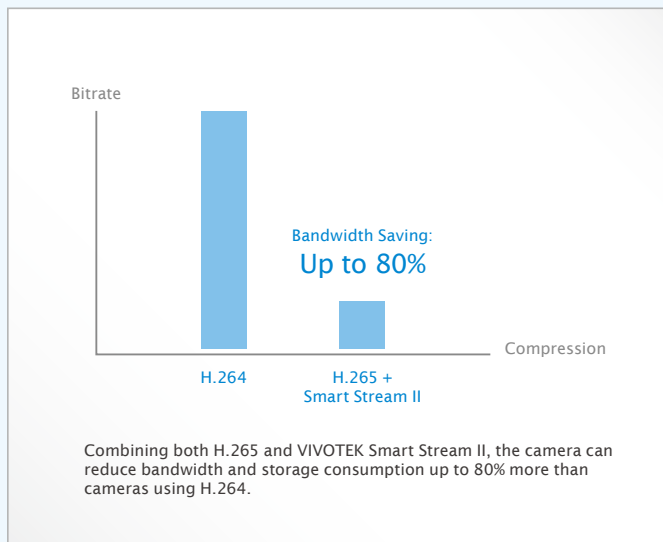

Banking



Hotel




Restaurant



Stores

Technical Specifications

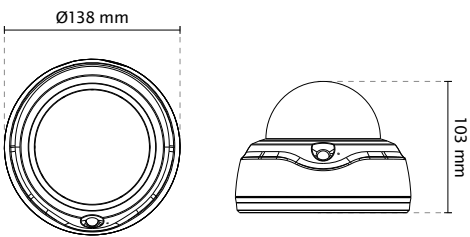Model	FD9171-HT	ONVIF	Supported, specifications available at www.onvif.org
System Information		Intelligent Video	
CPU	Multimedia SoC (System-on-Chip)	Video Motion Detection	Five-window video motion detection
Flash	128MB	VCA*	Line crossing detection, field detection, loitering detection
RAM	512MB	Alarm and Event	
Camera Features		Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Image Sensor	1/2.8" Progressive CMOS	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server, SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card
Maximum Resolution	2048x1536 (3MP)	General	
Lens Type	Vari-Focal	Smart Focus System	Remote Focus
Focal Length	f=3~9 mm	Connectors	RJ-45 cable connector for Network/PoE connection Audio input Audio output DC 12V power in/out Digital input*1 Digital output*1
Aperture	F1.2~F2.3	LED Indicator	System power and status indicator
Auto-iris	P-Iris	Power Input	12V DC IEEE 802.3af/at PoE, Class 0
Field of View	41° ~ 86° (Horizontal) 31° ~ 64° (Vertical) 51° ~ 113° (Diagonal)	Power Consumption	Max. 12W
Shutter Time	1/5 sec. to 1/16000 sec.	Dimensions	Ø 138 x 103 mm
WDR Technology	WDR Pro	Weight	530 g
Day/Night	Removable IR-cut filter for day & night function	Safety Certifications	CE, LVD, FCC Class B, VCCI, C-Tick, UL
Minimum Illumination	0.01 Lux @ F1.2 (Color) 0.001 Lux @ F1.2 (B/W)	Operating Temperature	Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F) Working Temperature: -10°C ~ 50°C (14°F ~ 122°F)
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)	Humidity	90%
IR Illuminators	30 meters	Warranty	36 months
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording	System Requirements	
Video		Operating System	Microsoft Windows 8/7/Vista/XP/2000
Compression	H.265 & H.264 & MJPEG	Web Browser	Mozilla Firefox 7~10 (streaming only) Internet Explorer 7/8/9/10/11
Maximum Frame Rate	H.264 & H.265 30fps@ 2048x1536 30fps@ 1920x1080 MJPEG 15fps@ 2048x1536 30fps@ 1920x1080	Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
Maximum Streams	3 simultaneous streams	Included Accessories	
S/N Ratio	43 dB	CD	User's manual, quick installation guide, Installation Wizard 2, VAST
Dynamic Range	100 dB	Others	Quick installation guide, screw pack, alignment sticker
Video Streaming	Adjustable resolution, quality and bitrate Smart Stream II	Dimensions	
Image Settings	Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks Scheduled profile settings, 3DNR, video rotation, defog		
Audio			
Audio Capability	Two-Way Audio (full duplex)		
Compression	G711, G726		
Interface	Internal microphone input Audio output		
Effective Range	5m		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS		
Interface	10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard		

* Available per project request.

Compatible Accessories

Mounting Kits



AM-215 (v02)
L Shape Bracket



AM-514 (v01)
Adapter Ring



AM-527 (v01)
Mounting Adapter



AM-712
Conduit Box



AP-FXC-0201
PoE Extender with
Conduit Box

PoE Kits

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Ver. 12



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455322
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
T: +31(0)36-5298-434
E: saleseurope@vivotek.com

VIVOTEK India
602, Best sky Tower, Plot No. F-5,
Netaji Subhash Place, Pitam Pura, Delhi-110 034
T: +91-11-45137465
E: salesindia@vivotek.com