

Avigilon Control Center™ Software with HDSM™ Technology




Avigilon Control Center (ACC) is an easy to use video management software, and has optimized how security professionals manage and interact with high definition video. As a distributed network platform with enterprise-class reliability, Avigilon Control Center is able to efficiently capture, manage and store high definition surveillance video while intelligently managing bandwidth and storage. Avigilon Control Center can be pre-installed and configured on an Avigilon High Definition Video Appliance, Network Video Recorder (NVR) with the industry's highest NVR network throughput or work as stand-alone software, to meet the needs of a wide variety of installations.

Avigilon Control Center records and manages both video and audio from the Avigilon™ line of megapixel cameras (from 1 – 5 MP and 4 – 7K based on horizontal resolution). ACC can seamlessly integrate with conventional analog cameras, along with a broad range of third-party IP cameras and encoders, giving you the ability to build a hybrid system – providing you with a budget-conscious migration from analog to digital. ACC software's easy-to-use interface allows personnel to evaluate and respond to events with minimal training.



COLLABORATIVE INVESTIGATIONS



ENTERPRISE SERVER MANAGEMENT



INTELLIGENT VIRTUAL MATRIX

Avigilon Control Center uses our patented HDSM™ software technology to efficiently compress and preserve image quality while intelligently managing HD image transmission throughout the Avigilon system — sending only the requested portions of captured images to operator workstations. This technology delivers exceptional image quality while providing immediate savings in transmission bandwidth allowing operators to use less powerful workstations and thereby reducing costs. Our HDSM technology leverages leading imaging, hardware, data compression and information technologies to maximize performance of the Avigilon system.

KEY FEATURES

- Easiest-to-use interface on the market
- Collaborative investigations
- Resilient enterprise server management
- Centralized system administration
- Intelligent virtual matrix
- Multi-megapixel high dynamic range image display
- Data protection and storage management
- Integrated graphic mapping for system layout
- HD recording and playback timeline
- Bandwidth management and remote viewing
- Bookmark and export HD surveillance footage
- Advanced video search

Advanced Control Center Features

Alarm Escalation

- Allows the creation of complete end-to-end workflows for the monitoring, assignment, and acknowledgement of alarms.

ACC Mobile

- Provides push alarm notifications, access to live and recorded video, and integrated audio talkdown from Android and iOS mobile devices.

POS Transaction Engine

- Link HD surveillance footage (viewed instantly) with transaction data to address compliance requirements and reduce shrinkage and theft.

License Plate Recognition

- Detects specific regional license plates as they appear in the camera field of view to monitor vehicle traffic.

Self-Learning Video Analytics

- Configure custom video analytics based events as alarm and rule triggers.

Acquisition Manager

- Ensures that all Avigilon cameras, regardless of resolution, are configured to collect exceptional HD and Ultra HD image quality over a wide range of lighting conditions.

Simple Camera and Server Installation

- Plug-and-play capabilities for NVRs and cameras that automatically identify themselves on the network, without manual configuration or searching — eliminating complex network configuration.


Detailed Management, Monitoring, and Reporting of System Status and Security

- Detailed logs of storage, network, and overall system status to ensure the highest possible system uptime for critical applications.

Scalable Integration with Legacy Systems

- Distributed architecture features a .NET-based API that can easily be integrated with other systems, such as access control and building management.

System Architecture

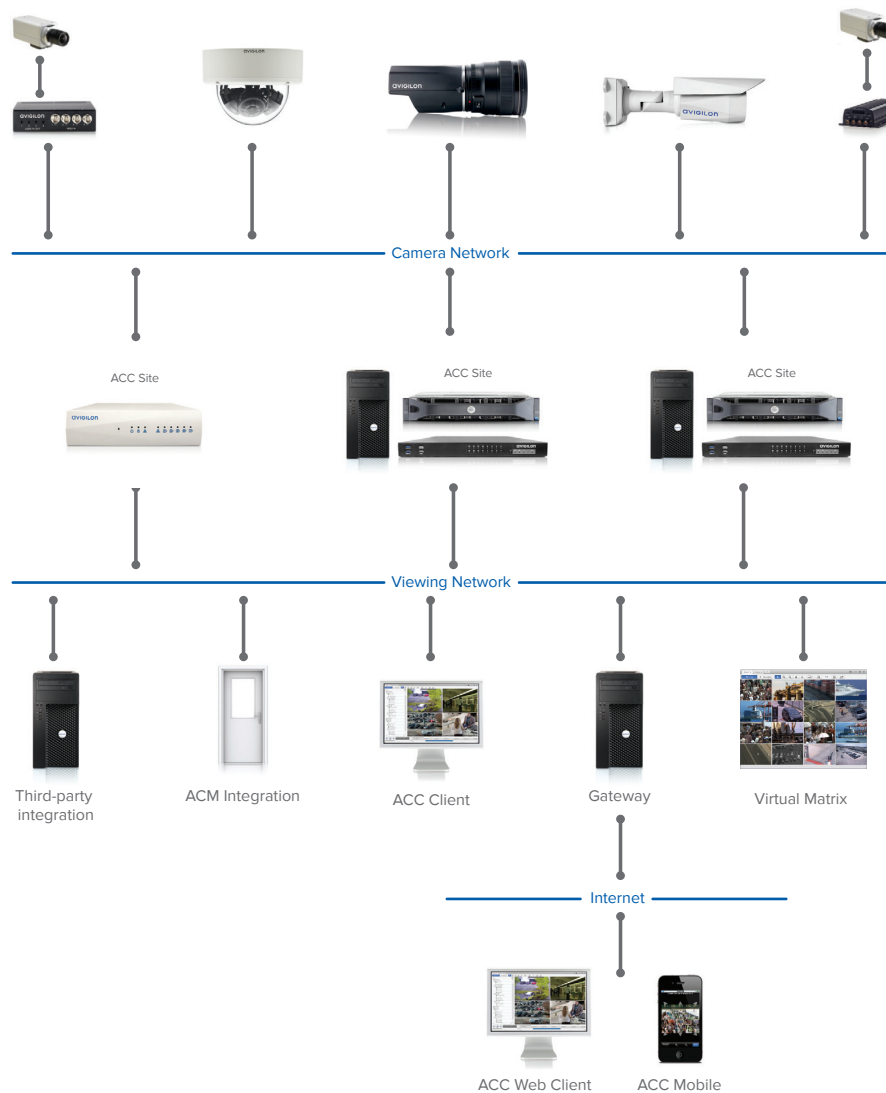

CORE, STANDARD & ENTERPRISE

To create a system most suited for your surveillance needs, the Avigilon Control Center software is offered in three editions: Core, Standard and Enterprise. The Enterprise edition includes more advanced features for a sophisticated solution, whereas the Standard edition is used for more focused needs or for those looking to transition to HD surveillance in a cost-effective way. ACC Core is an entry-level version of our award-winning software that delivers advanced high definition surveillance capabilities, ease of use, and superior image quality to smaller implementations. No matter what the size of your installation, you can customize a solution that is right for you.



System	Core	Standard	Enterprise
Number of cameras per server	24	48	300
Number of cameras per site	24	48	10 000
Number of servers per site	1	1	100
Number of client licenses per server	2	5	Unlimited
High Definition Stream Management (HDSM)	Yes	Yes	Yes

Device Support	Core	Standard	Enterprise
Automatic device discovery	Yes	Yes	Yes
Third-party IP cameras & encoders	Yes	Yes	Yes
Rialto™ analytics appliances	Yes	Yes	Yes
HD Pro cameras	No	No	Yes
H4 HD cameras with self-learning video analytics	Yes	Yes	Yes
HD cameras with self-learning video analytics	Yes	Yes	Yes
HD Micro Dome, HD Multisensor, HD Panoramic, HD PTZ cameras	Yes	Yes	Yes
ONVIF cameras & encoders	Yes	Yes	Yes
Avigilon encoders	Yes	Yes	Yes
H.264 support	Yes	Yes	Yes
MPEG4 support	Yes	Yes	Yes
MJPEG support	Yes	Yes	Yes
JPEG2000 support	Yes	Yes	Yes

Client	Core	Standard	Enterprise
Powerful, easy-to-use client interface	Yes	Yes	Yes
Self-learning video analytics overlay	Yes	Yes	Yes
Web browser client interface	Yes	Yes	Yes
Joystick support	Yes	Yes	Yes
ACC Mobile / Gateway	Yes	Yes	Yes
Saved views	No	Yes	Yes
Maps	No	Yes	Yes
Web pages	No	Yes	Yes
Windows user authentication	No	No	Yes
Editable Site View	Yes	Yes	Yes
Intelligent Virtual Matrix	No	No	Yes
Collaborative investigations	No	No	Yes

Recording, Searching and Playback	Core	Standard	Enterprise
Hourly configurable recording schedule	Yes	Yes	Yes
Intelligent motion search	Yes	Yes	Yes
Thumbnail search	Yes	Yes	Yes
Event search	Yes	Yes	Yes
Multi-camera export	Yes	Yes	Yes
Live export	Yes	Yes	Yes
POS transaction search	No	Yes	Yes
Alarm search	No	No	Yes
License plate event search	No	No	Yes

For the most current list of integrations and add-ons supported by Avigilon Control Center software, please visit avigilon.com

Add-On Modules and Integrations	Core	Standard	Enterprise
Point of Sale Transaction Engine	No	Yes	Yes
Avigilon developed and supported integrations	No	Yes*	Yes
3rd party system integrations	No	Yes	Yes

*CommScope iPatch, RS2 AccessIt, DDS Amadeus 5 and DSX only

Additional Features	Core	Standard	Enterprise
E-Mail event notification (motion & system event)	Yes	Yes	Yes
Central station notifications	No	Yes	Yes
Digital input email trigger	No	Yes	Yes
Manual digital output trigger	No	Yes	Yes
Audio recording	No	Yes	Yes
Audio output	No	Yes	Yes
Rule triggers	No	3	Unlimited
Self-learning video analytics event configuration	No	Yes	Yes
Redundant recording	No	No	Yes
Failover connections	No	No	Yes
Alarm escalation	No	No	Yes
Scheduled and one-time video archive	No	No	Yes
License Plate Recognition	No	No	Yes

Detailed Product Features

Integration Options

- Records and manages video from the full range of Avigilon high definition cameras.
- Monitor video and alarms remotely via a mobile device.
- Provides access to system video from a wide range of web browsers.
- Supports the recording and management of a wide range of third-party video and audio sources
- Supports the control of digital input triggers and triggering digital outputs through an I/O board.
- The Avigilon Application Programming Interface (API) enables the simple integration of Avigilon video surveillance with third-party applications.
- The Alarms tab provides the ability to monitor live alarm events received by access systems integrated with the Avigilon software. Users are given the ability to assign, acknowledge and investigate alarm video.
- The Armed Image Panels display live alarms as they are triggered within the video monitoring workspace, and provide the ability to acknowledge and investigate the live video.
- Integration alarms only need to be acknowledged in one system to be marked as acknowledged and processed in both.
- Avigilon develops and maintains integrations to a variety of 3rd party applications. The current list of available integrations is provided here: <http://avigilon.com/support-and-downloads/for-software/access-integration-and-plug-in-downloads/>
- Avigilon offers an SDK for 3rd parties to create system integrations with the Avigilon Control Center software. Some of the available integrations are listed here: <http://avigilon.com/support-and-downloads/for-software/system-integration-features/>

- Receives and translates transaction information from point-of-sale sources in multiple encoding formats.
- Provides the ability to link point-of-sale sources with video for the ability to monitor and review sales transactions.
- Rules can be used to generate events based on point-of-sale transaction exceptions.
- Rules can be used to generate license plate notifications.
- Live license plate recognition is available through an image panel overlay.

Recording

- Streams live and recorded video up to 60 frames per second.
- Support prioritizing streaming at 30 frames per second on 4K (8MP) cameras.
- Streams live and recorded video from cameras up to a resolution of 7K (30 MP) — 6720 x 4488.
- Decompresses H.264 video through the client graphics card to help leverage the client's total processing power.
- No proprietary recording hardware, hardware multiplexer or time-division technology is required for running the Avigilon system.
- Scalable to support up to 100 servers and/or 10,000 cameras per site.
- All recorded video and audio is digitally signed using 256-bit encryption so video can be authenticated for evidentiary purposes.
- Secure, command and control communication using SSL to protect against eavesdropping or tampering.
- External system alarms can be pre-selected and configured to be monitored and trigger event driven video operations.
- Video and audio recording can be defined by a recording schedule assigned to each video source.
- Recording schedules are based on event types that trigger video recording over a time period each day per week.

- Video recording can also occur manually by user triggered recording.
- Alarms and rules can be triggered by self-learning video analytics based events.
- Each recorded event includes a pre-event and post-event recording option to provide context for a given situation.
- Reference frame recording is an option when no events are detected.
- Motion detection is provided for each individual video source with adjustable sensitivity, threshold and detection zones.
- Primary and secondary video streams from each H.264 video source are recorded and maintained for a set amount of time before the primary stream is discarded as a means of increasing record time.
- The maximum recorded video retention time can be set for each video source.

Security

- Each system user can be granted specific live monitoring, investigative, system administration, and device access.
- Child sites can be connected to a parent site to create site families.
- All user, group, and permission settings for a child site can be synchronized with and controlled by a parent site.
- A corporate ranking hierarchy can be set up to accurately reflect a company's administrative structure.
- Each system user can only access features that are subordinate to their rank within the system hierarchy.
- Device access can be specific to cameras, encoders, maps, web pages and saved views.
- Windows Active Directory users can be imported and added to Avigilon Control Center Client groups.
- Imported Windows users can use their Windows credentials to access the Avigilon system.
- Permission groups can be copied to different sites and automatically applied to users imported from the same Active Directory.
- Ability to securely encrypt camera control traffic (if supported by the camera).
- Change camera authentication without disconnecting from a server.

System Administration

- Recorded video can be automatically archived on a schedule.
- Automatic archive can be configured to span a specific time period, cameras, or age of video.
- The system can be set to delete the oldest archived video when the disk is full to make room for new video recordings.
- Archived video can be saved to a local folder, mapped network drive, network storage area, USB or direct attached storage.
- Email notifications are available to tell users and system administrators when an event or system health error occurs. Emails can be set to occur on a schedule, and can include camera snapshots related to an event.
- Notifications can be sent to a central monitoring station whenever a configured event occurs.
- The system maintains an information log which can be used to trigger rules or external notifications.
- When a rule is triggered, the system can be set to execute actions in response.
- Users can be set to receive customized on-screen messages related

to a rule event.

- On-screen messages are displayed in one location and the importance of each message is color coded.
- A maintenance log and audit trail of all system errors and events is accessible through the client software and the Admin Tool.
- Monitor system health from one location. The status of connected Sites, servers and devices can be exported in PDF format.
- System wide software updates can be performed from any client with access to the Site.
- System configuration data, including device connection details, can be backed up and restored to new servers in the Site.

Video and Audio Controls

- License plate recognition is performed within a specific region of a camera's field of view. Detected license plate data is stored with the video data.
- A Watch List event can be created and used to monitor for the appearance of specific license plates.
- Pan, tilt, zoom (PTZ) controls through the RS-485 interface of a video source can be used and configured by the Avigilon system.
- The network settings for a video and audio source can be changed through the Avigilon software.
- Each camera's image quality and image rate can be changed without affecting the settings of other cameras.
- The system automatically displays an H.264 camera's secondary stream for live viewing when there is insufficient bandwidth to display the primary stream.
- A camera's exposure, iris, IR filter, backlight compensation, gain, priority, sharpening, saturation, focus, and white balance can be set through the Avigilon system.
- The image dimensions of JPEG2000 camera video can be changed.
- Camera image can be rotated 90°, 180° or 270°.
- Privacy zones can be added to a camera's field of view to block private areas in live and recorded video.
- Manually triggered video recording can be set to stop after a maximum recording duration.
- Audio input, output, gain and volume can be changed.
- Optional full-duplex two-way audio communication.
- Audio sources can be linked to any video source that is connected to the system.

System Display and Control

- Joysticks to control video display and specific system functions.
- Customizable keyboard commands.
- 1 to 64 video streams can be displayed simultaneously on a single monitor.
- Live and recorded video can be displayed in non-standard, customizable layouts.
- Save views for reuse.
- The system can be set to bias video display to a lower frame rate or to a lower image resolution if the client network bandwidth or client processing power is insufficient to display the full frame rate and image resolution.
- Information about the camera and scene can be displayed over live or recorded streaming video.

- The Video Analytics Activity overlay displays a color-coded bounding box around moving objects categorized as humans or vehicles.
- Configure the ability to display analytics activity for individual cameras or for the system.
- The ability to stream video and audio is limited only by the system hardware capabilities.
- The application window display can be shared with other users for collaborative investigations while viewing both live and recorded video.
- Live and recorded video and audio can be streamed simultaneously on the same monitor.
- Avigilon Virtual Matrix software can be used to provide remote control of multiple monitor displays, including video walls, that can be controlled by remote users with the appropriate rights and permissions.
- Avigilon Virtual Matrix software can display video, maps, and web pages from multiple Sites simultaneously.
- The same live or recorded video stream can be viewed at different zoom levels and areas of interest.
- Switch from live to recorded video on demand for an instant replay of recently recorded video.
- Cycle through a series of opened views (guard tour) based on a specified interval.
- All video sources connected to the system are displayed.
- Drag and drop a video source from a tree of video sources into a window for live or recorded video and audio monitoring.
- Drag and drop a saved view from a tree of views into a window for live or recorded video and audio monitoring.
- Configure how the tree of video sources, maps, web pages and views is displayed.
- Armed image panel is one or more regions in a window for displaying video directly linked to triggered alarms and rules.
- Alarms can be acknowledged directly from an armed image panel.
- Digital outputs can be manually triggered from the video monitoring area.

Maps

- Create a map to represent the physical location of cameras and other devices throughout the surveillance system.
- Maps are created from images stored in JPEG, BMP, PNG, or GIF image formats.
- Maps can contain links to other maps and reference a subsection of a camera's field of view.
- Drag and drop a video source from a map into a window for live or recorded video and audio monitoring.
- Cameras on a map are highlighted if the camera is linked to an alarm that has been triggered.
- A map within a map is highlighted if it contains a camera that is linked to an alarm that has been triggered.

Available Languages

- Arabic
- Chinese (Traditional)
- Danish
- English
- French
- Hebrew
- Japanese
- Norwegian
- Portuguese (Brazil)
- Russian
- Spanish
- Turkish
- Chinese (Simplified)
- Czech
- Dutch
- Finnish
- German
- Italian
- Korean
- Polish
- Portuguese (Portugal)
- Slovak
- Swedish

System Requirements

Avigilon Control Center Client

System requirements for a machine that will only be used as a remote monitoring client with a single monitor with a resolution of 1280 x 1024. Additional monitors and higher resolutions may require additional processing resources.

	Minimum	Recommended
Operating System	Windows Vista, Windows 7 (32-bit or 64-bit), Windows 8, Windows 8.1 or Windows 10	Windows 7 (64-bit)
Processor	Intel Dual Core 2.0 GHz	Quad Core 2.0 GHz
System RAM	2 GB	2 GB
Video Card	PCI Express, DirectX 10.0 compliant with 256 MB RAM	PCI Express, DirectX 10.0 compliant with 256 MB RAM
Network Interface	1 Gbps	1 Gbps
Hard Disk Space	500 MB	500 MB

Avigilon Control Center Server - Server Configuration

System requirements for a HD NVR Server with a recording capacity of 32 MB/s (256 Mbps) from up to 128 cameras. The specifications below are intended for an HD NVR Server with only remote viewing.

	Minimum	Recommended
Operating System	Windows Vista 64-bit, Windows Server 2008, Windows Server 2012, Windows Server 2012 R2, Windows 7, Windows 8, Windows 8.1 or Windows 10	Windows Server 2008, or Windows 7.
Processor	Intel Quad Core Xeon 2.0 GHz	Intel Quad Core Xeon 2.0 GHz
System RAM	4 GB DDR2	4 GB DDR2
Network Interface	1 Gbps Intel Pro/1000 or Broadcom NetXtreme II server adapters	1 Gbps Intel Pro/1000 or Broadcom NetXtreme II server adapters
Hard Drives	SATA-II 7200 RPM Enterprise Class Hard Drives	SATA-II 7200 RPM Enterprise Class Hard Drives

Avigilon Control Center Server - Workstation Configuration

System requirements for a HD NVR Workstation with a recording capacity of 10 MB/s (80 Mbps) from up to 64 cameras and the ability to view live and recorded image data locally. This system should be able to support up to two monitors with a resolution of 1280 x 1024 each.

	Minimum	Recommended
Operating System	Windows Vista 32-bit or 64-bit, Windows Server 2008, Windows Server 2012, Windows Server 2012 R2, Windows 7, Windows 8, Windows 8.1 or Windows 10	Windows Server 2008, or Windows 7
Processor	Intel Quad Core Xeon 2.0 GHz	Intel Quad Core Xeon 2.0 GHz
System RAM	2 GB DDR2	4 GB DDR2
Network Interface	1 Gbps	1 Gbps
Video Card	nVidia Quadro FX 570 dual DVI	nVidia Quadro FX 570 dual DVI
Hard Drives	SATA-II 7200 RPM Hard Drives	SATA-II 7200 RPM Hard Drives

Avigilon Control Center Gateway

Avigilon Control Center Gateway can be installed on the same computer as Avigilon Control Center Server, but for optimal performance results it is recommended that the Gateway be installed separately. The Gateway can handle up to 36 concurrent video streams if installed on a computer with the listed requirements.

	Minimum	Recommended
Operating System	Windows Vista 64-bit, Windows Server 2008, Windows Server 2012, Windows Server 2012 R2, Windows 7, Windows 8, Windows 8.1 or Windows 10	Windows Server 2008, or Windows 7
Processor	Quad Core 2.0 GHz	Quad Core 2.0 GHz
System RAM	4 GB DDR2	4 GB DDR2
Hard Disk Space	500 MB	500 MB

Avigilon Control Center Mobile

Avigilon Control Center Mobile (ACC Mobile) is currently only available for the listed device platforms. For all other mobile devices, use the Avigilon Control Center Web Client.

Android version 4.x or 5.x	iPad with iOS 7, 8 or 9
	iPhone with iOS 7, 8 or 9
	iPod Touch with iOS 7, 8 or 9

Avigilon Control Center Web Client

Avigilon Control Center Web Client can be accessed from the listed web browsers.

Internet Explorer version 9.0 or later	Firefox version 15 or later
Chrome version 20 or later	Safari version 9.0 or later

Avigilon Control Center LPR Plugin

Avigilon Control Center LPR Plugin is supported on the listed operating systems.

Windows Vista 64-bit	Windows Server 2008
Windows 7	