

Basler IP Fixed Dome Cameras

NETWORK CAMERAS



- Premium image quality
- CCD and CMOS sensors
- HD, Full HD
- Multi-streaming and multi-encoding
- MJPEG, MPEG-4, H.264

OVERVIEW

Basler IP Fixed Dome Cameras

Basler's network camera portfolio includes robust, easy-to-install network cameras with dome housings for your network video applications outdoors and under tough indoor conditions. Basler IP Fixed Dome Cameras will impress you with their exceptional image quality and light sensitivity. We also offer dome camera models with integrated audio and auto focus functionalities.

With their built-in heater and fan, Basler's outdoor dome cameras work at extreme operating temperatures from -40 °C to +50 °C (-40 °F to +122 °F). Basler's dome cameras are especially energy efficient. All camera functions, including the fan and heater, can be powered using standard PoE (Power over Ethernet IEEE 802.3af Class 0). Their built-in microSDHC card slot can be used for local file storage of up to 32 MB of data.

Basler IP Cameras are used in a variety of applications, ranging from building surveillance, bank and casino security, goods protection, and traffic applications. Does your project require a special camera solution? Please contact us and we'll help you find the right fit for your application!



TECHNICAL DETAILS


Specifications



| CMOS Sensor Cameras | BIP2-D1920c-dn (Indoor) | BIP2-D1920c-dn (Indoor, AF) | |
|-------------------------|---|-----------------------------|--------|
| Image Sensor | Progressive Scan CMOS, rolling shutter | | |
| Effective Pixels | 1920 (H) x 1440 (V) | | |
| Frame Rate (max.) | MJPEG | MPEG-4 | H.264 |
| Full Resolution: | 20 fps | 20 fps | 20 fps |
| Full HD (1920 x 1080): | 30 fps | 30 fps | 30 fps |
| Pixel Size | 2.2 μm x 2.2 μm | | |
| Minimum Illumination | Color: 0.88 lux (F1.3/33ms), Day/Night: 0.15 lux (F1.3/33ms) | | |
| Lens | Varifocal 2.8-10 mm, F1.3, DC iris, horizontal angle of view 25°-88°, movable IR-cut filter for day/night function | | |
| Auto Focus | No | Yes | |
| Camera Angle Adjustment | Pan: 360°, tilt: 120°, rotation: $\pm 180^\circ$ | | |
| Image Settings | Automatic gain, exposure area, backlight compensation, white balance, 180° image rotation, mirroring of images, anti-flicker, electronic PTZ via AOI (API), text overlay, privacy masks, motion detection | | |
| Resolution | From 160 x 120 to 1920 x 1440 (free scaling), 4:3, 16:9, multiple Areas of Interest (AOIs) | | |
| Video Compression | Motion JPEG: Multiple compression levels MPEG-4: SP (Level 3) H.264 (MPEG-4 AVC): Baseline and high profile (levels up to 5.0) | | |
| Video Streaming | Dual streaming for MJPEG, H.264, or MPEG-4; VBR and CBR for MJPEG and MPEG-4 VBR, CBR, and CVBR for H.264; multicast and unicast | | |
| Audio | Bidirectional half-duplex audio streaming; mic-in/line-in, line-out; G.711 | | |
| Alarm Management | Ring buffer for pre and post alarm images, microSDHC card slot for local storage Events triggered by motion detection or external input, image upload over FTP, e-mail, or HTTP | | |
| Protocols | TCP/IP, HTTP, UDP, FTP, ICMP, ARP, DHCP, NTP, RTP, RTSP, RTCP, SMTP, IGMP, ZEROCONF, QoS Layer 3, SNMP | | |
| Processor/Memory | Multimedia Video Processor, FPGA, 256 MB RAM, 64 MB Flash | | |
| Power | PoE (Power over Ethernet IEEE 802.3af Class 2) Power consumption typ. 5.5 W at 12 VDC | | |
| Connectors | RJ-45 connector for 10/100 BASE-T Ethernet, full or half duplex Push-in terminal for digital I/O and RS-485/422 | | |
| Operating Conditions | -10 °C to 50 °C (14 °F to 122 °F), <90% relative humidity (non-condensing) Starting temperature: 0 °C to 50 °C (32 °F to 122 °F) | | |
| Standards | DIN EN 50130-4, FCC Class A, CE, RoHS, ONVIF | | |
| Housing | \varnothing 148 mm x 122 mm (\varnothing 5.83" x 4.8") plastic chassis with polycarbonate dome bubble | | |
| Weight | ~0.6 kg | | |

Specifications are subject to change without prior notice.

Dimensions in mm (inch)

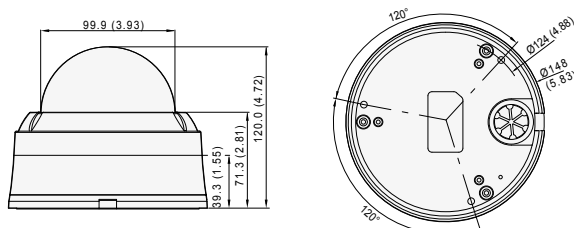

TECHNICAL DETAILS


Specifications



| CMOS Sensor Cameras | BIP2-D1920c-dn (Outdoor) | | BIP2-D1920c-dn (Outdoor, AF) |
|-------------------------|---|--------|------------------------------|
| Image Sensor | Progressive Scan CMOS, rolling shutter | | |
| Effective Pixels | 1920 (H) x 1440 (V) | | |
| Frame Rate (max.) | MJPEG | MPEG-4 | H.264 |
| Full Resolution: | 20 fps | 20 fps | 20 fps |
| Full HD (1920 x 1080): | 30 fps | 30 fps | 30 fps |
| Pixel Size | 2.2 μm x 2.2 μm | | |
| Minimum Illumination | Color: 0.88 lux (F1.3/33ms), Day/Night: 0.15 lux (F1.3/33ms) | | |
| Lens | Varifocal 2.8-10 mm, F1.3, DC iris, horizontal angle of view 25°-88°, movable IR-cut filter for day/night function | | |
| Auto Focus | No | Yes | |
| Camera Angle Adjustment | Pan: 360°, tilt: 120°, rotation: $\pm 180^\circ$ | | |
| Image Settings | Automatic gain, exposure area, backlight compensation, white balance, 180° image rotation, mirroring of images, anti-flicker, electronic PTZ via AOI (API), text overlay, privacy masks, motion detection | | |
| Resolution | From 160 x 120 to 1920 x 1440 (free scaling), 4:3, 16:9, multiple Areas of Interest (AOIs) | | |
| Video Compression | Motion JPEG: Multiple compression levels MPEG-4: SP (Level 3) H.264 (MPEG-4 AVC): Baseline and high profile (levels up to 5.0) | | |
| Video Streaming | Dual streaming for MJPEG, H.264, or MPEG-4; VBR and CBR for MJPEG and MPEG-4 VBR, CBR, and CVBR for H.264; multicast and unicast | | |
| Audio | Bidirectional half-duplex audio streaming; mic-in/line-in, line-out; G.711 | | |
| Alarm Management | Ring buffer for pre and post alarm images, microSDHC card slot for local storage Events triggered by motion detection or external input, image upload over FTP, e-mail, or HTTP | | |
| Protocols | TCP/IP, HTTP, UDP, FTP, ICMP, ARP, DHCP, NTP, RTP, RTSP, RTCP, SMTP, IGMP, ZEROCONF, QoS Layer 3, SNMP | | |
| Processor/Memory | Multimedia Video Processor, FPGA, 256 MB RAM, 64 MB Flash | | |
| Power | PoE (Power over Ethernet IEEE 802.3af Class 0) or 12 to 24 VDC Power consumption typ. 5.5 W at 12 VDC (excl. heater) | | |
| Connectors | RJ-45 connector for 10/100 BASE-T Ethernet, full or half duplex Push-in terminal for DC power, digital I/O, and RS-485/422 | | |
| Operating Conditions | -40 °C to 50 °C (-40 °F to 122 °F), <90% relative humidity (non-condensing) Starting temperature: -40 °C to 50 °C (-40 °F to 122 °F) | | |
| Standards | DIN EN 50130-4, FCC Class A, CE, RoHS, ONVIF | | |
| Housing | \varnothing 148 mm x 122 mm (\varnothing 5.83" x 4.8") vandal-proof aluminum chassis with polycarbonate dome bubble, IP66 | | |
| Weight | -1.0 kg | | |

Specifications are subject to change without prior notice.

Dimensions in mm (inch)

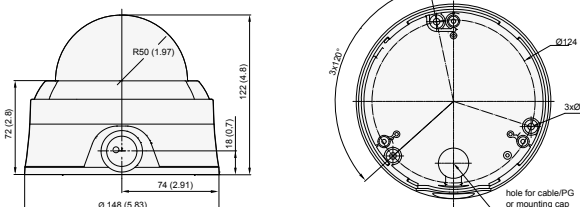

TECHNICAL DETAILS

Specifications



| CCD Sensor Cameras | BIP2-D1000c-dn | | | BIP2-D1300c-dn | | |
|---------------------------------------|---|------------------|-----------------|--|------------------|-----------------|
| Image Sensor | Progressive Scan CCD, global shutter | | | Progressive Scan CCD, global shutter | | |
| Effective Pixels | 1024 (H) x 768 (V) | | | 1280 (H) x 960 (V) | | |
| Frame Rate (max.) Full Resolution: | MJPEG 30 fps | MPEG-4 30 fps | H.264 30 fps | MJPEG 30 fps | MPEG-4 30 fps | H.264 30 fps |
| Pixel Size | 4.65 µm x 4.65 µm | | | 3.75 µm x 3.75 µm | | |
| Minimum Illumination | Color: 0.53 lux (F1.3/33ms), Day/Night: 0.14 lux (F1.3/33ms) | | | Color: 0.42 lux (F1.3/33ms), Day/Night: 0.10 lux (F1.3/33ms) | | |
| Lens | Varifocal 2.8-10 mm, F1.3, DC iris, horizontal angle of view 28°-100°, movable IR-cut filter for day/night function | | | | | |
| Camera Angle Adjustment | Pan: 360°, tilt: 120°, rotation: ±180° | | | | | |
| Image Settings | Automatic gain, exposure area, backlight compensation, white balance, 180° image rotation, mirroring of images, anti-flicker, electronic PTZ via AOI (API), text overlay, privacy masks, motion detection | | | | | |
| Resolution | From 160 x 120 to 1024 x 768 (free scaling), 4:3, 16:9, multiple Areas of Interest (AOIs) | | | From 160 x 120 to 1280 x 960 (free scaling), 4:3, 16:9, multiple Areas of Interest (AOIs) | | |
| Video Compression | Motion JPEG: Multiple compression levels MPEG-4: SP (Level 3) H.264 (MPEG-4 AVC): Baseline and high Profile (levels up to 5.0) | | | | | |
| Video Streaming | Multi-encoding and multi-streaming for MJPEG, H.264, and MPEG-4 VBR and CBR for MJPEG and MPEG-4; VBR, CBR, and CVBR for H.264; multicast and unicast; Uncompressed YUV images using real-time trigger (max. 4 fps) | | | | | |
| Audio | Bidirectional half-duplex audio streaming; mic-in/line-in, line-out; G.711 | | | | | |
| Alarm Management | Ring buffer for pre and post alarm images, microSDHC card slot for local storage Events triggered by motion detection or external input (real-time trigger) Image upload over FTP, e-mail, or HTTP | | | | | |
| Protocols | TCP/IP, HTTP, UDP, FTP, ICMP, ARP, DHCP, NTP, RTP, RTSP, RTCP, SMTP, IGMP, ZEROCONF, QoS Layer 3, SNMP | | | | | |
| Processor/Memory | Multimedia Video Processor, FPGA, 256 MB RAM, 64 MB Flash | | | | | |
| Power | PoE (Power over Ethernet IEEE 802.3af Class 0) or 12 to 24 VDC Power consumption typ. 5.5 W at 12 VDC (excl. heater) | | | | | |
| Connectors | RJ-45 connector for 10/100 BASE-T Ethernet, full or half duplex Push-in terminal for DC power, digital I/O and RS-485/422 | | | | | |
| Operating Conditions | -40 °C to 50 °C (-40 °F to 122 °F), <90% relative humidity (non-condensing) Starting temperature: -40 °C to 50 °C (-40 °F to 122 °F) | | | | | |
| Standards | DIN EN 50130-4, FCC Class A, CE, RoHS, ONVIF | | | DIN EN 50130-4, FCC Class B, CE, RoHS, ONVIF | | |
| Housing | Ø148 mm x 122 mm (Ø5.83" x 4.8") vandal-proof aluminum chassis with polycarbonate dome bubble, IP66 | | | | | |
| Weight | -1.0 kg | | | | | |

Specifications are subject to change without prior notice.

OTHER INFORMATION

How Does Basler Ensure Superior Quality and Reliable High Performance?

Our approach to quality assurance is rigorous: we continually audit all facets of our business to guarantee performance, increase efficiency and reduce costs for our customers. We are compliant with all major quality standards including ISO 9001, CE, RoHS, ONVIF, and more. To ensure consistently high product quality, we employ several quality inspection procedures during manufacturing.

Every Basler camera is subjected to exhaustive optical and mechanical tests before leaving the factory. We have developed a unique combination of optics, hardware, and software tools that can quickly and efficiently calibrate a camera and measure its performance against a set of standard performance criteria. Regardless of what technology or camera model you choose you can be assured of consistent performance.

3-Year Warranty

Basler offers a 3-year warranty for our cameras. We make this unprecedented promise because we have unparalleled confidence in our products. We continually reinvest in research, development and superior manufacturing capabilities so that our customers can fully rely on the products we manufacture.

About Basler

Founded in 1988, Basler is a leading global manufacturer of high quality digital cameras for industrial, medical, traffic and video surveillance applications. The company employs more than 400 people at its headquarters in Ahrensburg, Germany and subsidiaries in the United States and Asia.

Basler's portfolio of products offers customers the vision industry's widest selection of industrial and network cameras. Today it includes some 300 models – and it's still growing. We're committed to developing technology that drives business results for our customers: cameras that are easy to use, easy to integrate, and deliver an exceptional price/performance ratio.



©Basler AG, No. 03, 05/2014
ID 2000030021

Basler AG

Germany, Headquarters

Tel. +49 4102 463 500
Fax +49 4102 463 599
sales.europe@baslerweb.com
www.baslerweb.com

USA

Tel. +1 610 280 0171
Fax +1 610 280 7608
sales.usa@baslerweb.com

Singapore

Tel. +65 6367 1355
Fax +65 6367 1255
sales.asia@baslerweb.com

Taiwan

Tel. +886 3 558 3955
Fax +886 3 558 3956
sales.taiwan@baslerweb.com

China (Shanghai)

Tel. +86 21 6230 2160
Fax +86 21 6230 0251
sales.china@baslerweb.com

China (Shenzhen)

Tel. +86 181 2395 6667
Fax +86 21 6230 0251
sales.china@baslerweb.com

Korea

Tel. +82 70 7136 3114
Fax +82 70 7016 2705
sales.korea@baslerweb.com

BASLER
the power of sight