

EVS410



Features


- High quality H.264/ and MJPEG
- Dual stream (per channel) for simultaneous live monitoring and high resolution recording
- Smart Wizard setting for varies event and schedule recording
- Built-in SD memory card slot for local storage
- Supports SD high capacity
- Space saving with ultra compact design



Specifications

Channels	4
Recording/Playback Rate	up to 30 FPS per channel
Total Recording Rate	up to 120FPS (4 channels up to 30 FPS each)
Recording Resolution	4CIF, VGA, CIF, QVGA, QCIF
Compression Supported	H.264/M-JPEG
Compression Method	IMA ADPCM (Pulse Code Modulation)
Audio	Two-way audio
Video Storage (Excludes O/S and system software on HDD 1)	SD card interface for local storage, supports SDHC
Network Interface	10Base-T/100Base-TX auto-negotiation, RJ-45 socket. Supports MDI/MDI-X auto crossover function.
Max Client Limit	32 simultaneous clients
Pre/Post Alarm Buffer	Unsure, as no mention is technical specs, advisable to leave it as ""
Alarm I/O	4 in/ 2 out
Event Trigger	Alarm Input, Manual Trigger, Motion Detection and Schedule Recording
Notification	Trigger alarm output, send email notification, upload video to FTP, record video to SD card, record video to PC and network alarm
PTZ	Supports PTZ control
Remote Video Access Method	Internet Explorer 8
Power	12VDC
Power Consumption	36W (12VDC)
Temperature	0°C ~50°C / 32°F~122°F
Housing	Compact
Dimensions	5.2"(W) x 1.5"(H) x 6.5" (D)
Weight	1.47 lbs
Certifications	CE, FCC

Dimensions: mm/in

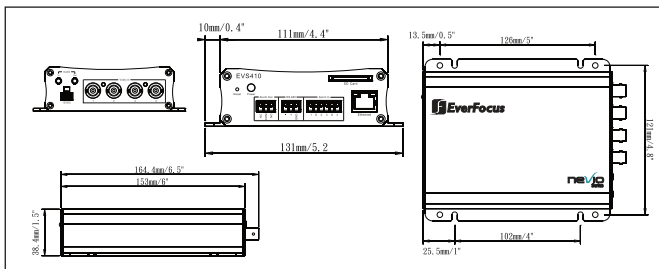

Ordering Info

EVS410: 4 Ch., Video Server Encoder

