


EHD360

540 TVL, 3-Axis, Vandal Proof & Weather Resistant IR Dome Camera

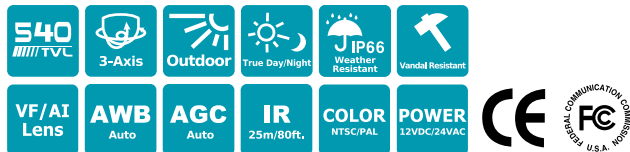

Outdoor IR Dome Cameras

Features

- Color dome camera with SONY 1/3" Super HAD CCD sensor
- High resolution 540 TVL
- 3-Axis design for flexible lens positioning
- High sensitivity, low smear, high anti-blooming and high S/N ratio
- Built-in Auto Gain Control (AGC), Auto Tracing White Balance (ATW)
- Built-in 3.7~12mm vari-focal DC-drive Auto Iris lens.
- 25m (~80ft.) range IR-LEDs
- True Day/Night auto switching with IR filter removal for B/W images in low light environments
- Vandal proof to withstand impact of a 10 pound sledgehammer
- Weather resistant, IP66 rated

Specifications

Pickup Device	1/3" SONY Super HAD CCD sensor
Video Format	NTSC or PAL (depends on model selected)
Picture Elements	768 x 494 (NTSC), 752 x 582 (PAL)
Horizontal Resolution	540 TVL
Sensitivity	0.12 Lux / F1.6; 0 Lux (IR LED ON)
S/N Ratio	Over 48dB (AGC off)
Electronic Shutter	1/60(1/50)s~1/100,000sec.
Video Output	BNC 1.0Vp-p, 75Ω
Gamma Correction	0.45
Lens Type	Vari-Focal 3.7~12mm / F1.4 DC Drive Auto Iris Lens
Day/Night	True Day/Night with motorized IR cut filter
Gain Control	Automatic
White Balance	ATW (2500°K~9500°K)
Sync. Mode	Internal Sync.
IR LED	11 Units High Efficiency IR LED
IR Wavelength	850nm
IR Distance	25m (~80ft.) nominal; depends on environment
Weather Resistant	IP 66
Vandal Proof	Yes
Power Source	12VDC
Power Consumption	12VDC: 3.4W max.
Operating Temperature	-10°C~50°C / 14°F~122°F
Dimensions (O.D. x H)	142 x 115.5mm/5.6" x 4.55"
Weight	979g/2.16lbs
Certificates	CE, FCC

Dimensions

