

EMX32

16-Channel or 32-Channel Surveillance Signage

NEW




Features

- Decodes up to four 1080p/30fps video streams in H.264 codec simultaneously
- Decodes up to 16 IP streams or 32 analog channels (TBD)
- Multiple main monitors: Separately configured HDMI and VGA (1080p) main monitor outputs
- Multiple control inputs: mouse / remote controller
- Remote configuration support from built-in web interface
- Standing mount and VESA mount options

Specifications

Model Name	EMX32	
Channel Number	IP: 16CH	Analog: 32CH (TBD)
	NTSC 120fps@1080p PAL 100fps@1080p (Depend on IP Camera)	NTSC 320fps @320x240; PAL 256fps @320x256
Video Codec	H.264	
Performance	80 Mbps	
Video Output	HDMI : 720X480, 1024X768, 1920X1080 VGA : 720X480, 1024X768, 1920X1080	
Alarm In	4	
Alarm Out	1	
Watch Dog Timer	Yes	
User Interface	GUI(Graphical User Interface)	
OS	Embedded Linux	
Network / Protocol	10/100Mbps Ethernet ; TCP-IP / DHCP/ PPPoE / EverFocus DDNS / RTSP / RTP / HTTP / SMTP / POP3 / SSL	
Control PTZ via OSD	Yes	
Dual Streaming	Yes	
USB	1 USB 2.0 ports (on Back Panel)	
User Access	3 Levels of user access supported	
RS-485	1 RS-485	
Power Source	12VDC/ 5A (Max. 60 W)	
Operating Temperature	0°C~40°C / 32°F~104°F (20~80% humidity)	
Dimensions (L x W x H)	160 x 160 x 45 mm ; 6.29 x 6.29 x 1.77 inch	
Certificates	CE, FCC, ROHS	
Language	English, Japanese, Traditional Chinese, Spanish, Deutsch, French, Russian, Portuguese (Brazil), Dutch , Simplified Chinese, Italian	

Dimensions

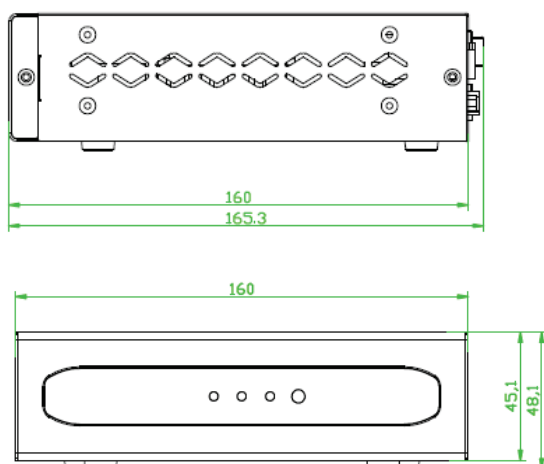

• All product specifications are subject to change without notice
 • Models vary in different countries. Please visit EverFocus regional websites for detailed ordering information
 • Lens models and availability vary in different regions