



## SR 400 Intruder Alarm Siren

### Description

SR 400 is an outdoor piezo siren. The siren has blue flash indication and selectable loudness levels. SR 400 is equipped with inner plastic casing and bidirectional tamper for higher protection.

The siren comes with built in NiMH battery (9V / 180mA).

SR 400 has a flat plastic cover, which is especially suitable for company sticker or logo.



### Technical Specifications

Loudness . . . . . 85 dB/1m (low level); 105 dB/1m (high level)

Power supply . . . . . 9-15VDC

Current consumption:

- Standby mode . . . . . 10mA

- Alarm mode . . . . . 270mA

Battery . . . . . 9V/ 180mA, built-in, NiMH

Frequency . . . . . 2.8 - 3,1 KHz

Loudspeaker type . . . . . piezo


Protection . . . . . IK04

Operating temperature . . . . -30°C / +70°C

Housing . . . . . ABS plastic box with inner plastic cover

Dimensions . . . . . 309 x 197 x 40 mm

Weight . . . . . 1,24kg

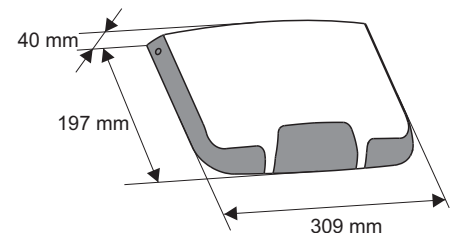

### Functional Specifications

Inputs . . . . . 1 ALARM and 1 FIRE

Connection type . . . . . 2 or 3 wire connection

Inner cover for electronics protection . plastic

Tamper switch . . . . . bi-directional

LED indication . . . . . status, blue flash

### Packing Information

• **Packing box** - 1 unit SR 400, dimensions 312 x 200 x 53 mm

### Compatible Product Range

- **ECLIPSE 8/16/32** - Control panels ECLIPSE Series
- **BRAVO MOUT** - Expanding module for wired sirens
- **CA 62** - Alarm control panel
- **VEGA6/ VEGA6 RF** - Alarm control panel

### Contact Information