

SensoIRIS MCP150 IP67 Outdoor Manual Call Point

EN 54-11/ 17
EN 60529

Description

The addressable manual call point SensoIRIS MCP150 IP67 is designed for outdoor installations and IP67 environments*. The call point has a built-in isolator module which when used allows continuous operation of the loop in case of short circuit and without need of using additional isolator modules.

The call point is equipped with a protective transparent cover for avoiding of fault or accidental activation.

SensoIRIS MCP150 IP67 is powered on from the fire panel and can be controlled via the communication protocol.

* The declared IP67 is achieved only when using IP67 rated cable glands!



CE₁₇
1293


DoP No: 060

1293-CPR-0538

EVPU: N.B.1293

Technical and Environmental Specifications

Operating Voltage Range	15 - 32VDC
Consumption without communication (max) . . .	125µA@27VDC
Consumption with communication	160µA@27VDC
Consumption in Fire mode	3mA
Type of the working element	resettable (flexible)
Type, according EN54-11	A
Wire Gauge for terminals.	2.5mm ²
Operating temperature	-10°C to +60°C
Relative humidity resistance	(93 ± 3)% @ 40°C
Protection	IP67
Mounting	Indoor and Outdoor
Weight	~262g
Dimensions	114x114x80mm
Material (plastic), color.	ABS, red

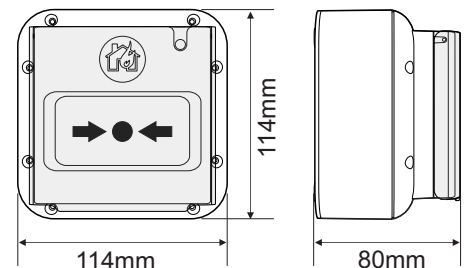

Packing Information

• **Single packing box** - Dimensions 118x118x80 mm.

The kit includes:

- SensoIRIS MCP150 IP67 - 1 pc
- Special tool for test and reset - 1 pc
- IP67 rated cable glands - 2 pcs


• **Carton box** - 40 kits of SensoIRIS MCP150 IP67, dimensions 560x362x320 mm

Contact Information:


SensoIRIS MCP150 IP67 Outdoor Manual Call Point

EN 54-11/ 17
EN 60529

● Connection Diagrams

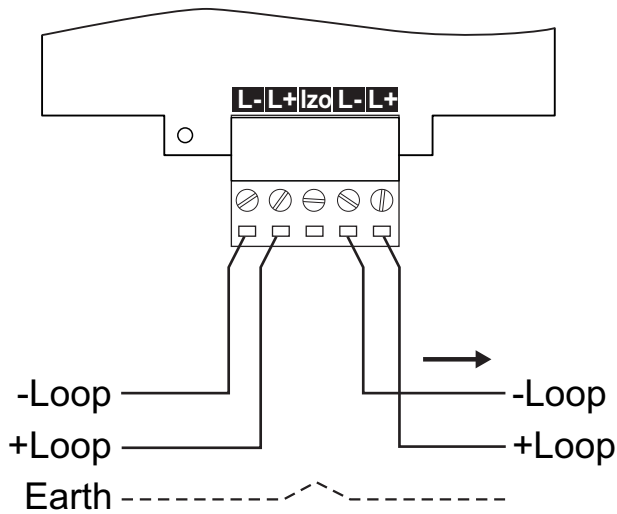

Without built-in isolator module

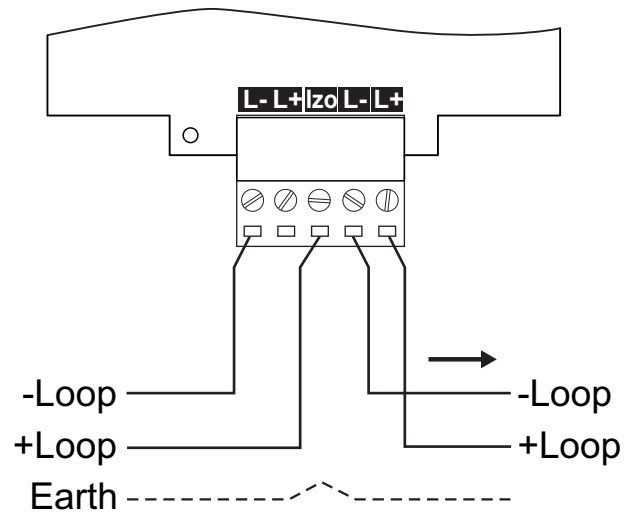

With built-in isolator module

● Compatible Product Range

- **IRIS** - Addressable Fire Panel, 4 loops, 96 zones
- **IRIS PRO** - Addressable Fire Panel, metal box, 4 loops, 96 zones
- **SIMPO** - Addressable Fire Panel, 2 loops, 48 zones
- **SensoIRIS Programmer** - Address Programming Tool

● Contact Information: