

Eclipse LED 16A


LED Keypad

Description

LED 16A is a keypad with LED indication of zones, system troubles, alarm messages and arming type. It is part of the ECLIPSE series alarm systems. The keyboard provides 1 input zone. LED 16 is suitable for programming and management of systems up to 3 independent areas and up to 16 zones.

Technical Specifications

Power Supply from the control panel	9-18V (nom. 14V)
Consumption	Min. 50mA / Max. 80mA
Area Indication	3
Zone Indication	16
Panic buttons	Yes
Buttons	Rubber
Operation temperature	-20 ÷ +50°C
Tamper	Yes
Dimensions	100x90x24mm

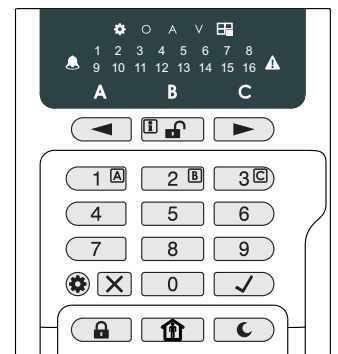

Functional Specifications

- Shortcut buttons to additional menus – Memory, Troubles display and Bypassed zones;
- Quick buttons for all arming modes;
- 3 fast buttons' combination for sending of PANIC, MEDICAL and FIRE alarm messages to a central monitoring station;
- The system parameters can be fully programmed;
- Supports 2 programming types: 4-digit addresses and 3-digit operations;
- Adjustable intensity of backlight for the display and buttons;
- Adjustable sound volume of the internal buzzer.

Packing Information

- **Master box** - 80 units LED 16A, dimensions 496 x 305 x 206 mm

Compatible Product Range

- **Eclipse 8** - Alarm Control Panel
- **Eclipse 16** - Alarm Control Panel
- **Eclipse 32** - Alarm Control Panel

Contact Information