



FD8373-EHV

Fixed Dome Network Camera

3MP · 20M IR · Smart Stream · Smart Focus System · IP66 · IK10 · Smart IR · WDR Pro · 3DNR

VIVOTEK's FD8373-EHV network camera features a 3-Megapixel WDR CMOS sensor to cope with challenging lighting conditions. The WDR Pro feature allows the camera to capture both the dark and bright areas of an image and combine the differences to generate a highly realistic representation of the original scene. This feature enables the camera to provide video quality very close to the capabilities of the human eye. The FD8373-EHV can be deployed widely in high contrast outdoor environments such as parking areas and streets. The P-iris lens controls the iris with extreme precision; with its built-in stepper motor, it maintains the iris opening at an optimal level at all times, resulting in superior image clarity and depth of field.

The IP66-rated housing is designed to help the camera body withstand rain and dust and ensures smooth operation even under a multitude of harsh weather conditions while its IK10-rated housing can provide the protection against the vandal act and impact. Additionally, the wide temperature range further enhances the FD8373-EHV's performance and reliability in extremely cold environments.

Key Features

- 3-Megapixel CMOS Sensor
- 20 fps @ 2048x1536
- Motorized, P-iris Lens
- Smart IR Technology to Avoid Overexposure
- Built-in IR Illuminators, Effective up to 20 Meters
- Smart Stream
- 3D Noise Reduction
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage
- WDR Pro for Unparalleled Visibility in Extremely Bright and Dark Environments
- Smart Focus System for Remote and Precise Focus Adjustment
- Two-way Audio
- Weather-proof IP66-rated Housing
- Vandal-proof IK10-rated Housing



With WDR Pro

Without WDR Pro



Aisle



Train Station



Airport




Entrance

Technical Specifications

Model	FD8373-EHV
System Information	
CPU	Multimedia SoC (System-on-Chip)
Flash	128 MB
RAM	256 MB
Camera Features	
Image Sensor	1/3 " Progressive CMOS
Maximum Resolution	2048x1536
Lens Type	Vari-focal, remote focus
Focal Length	f = 2.8 ~ 12 mm
Aperture	F1.8 ~ F2.85
Auto-iris	P-iris
Field of View	29.7° ~ 82.6° (Horizontal) 22.4° ~ 61.9° (Vertical) 37.6° ~ 108.7° (Diagonal)
Shutter Time	1/5 sec. to 1/32,000 sec.
WDR Technology	WDR Pro
Day/Night	Removable IR-cut filter for day & night function Smart IR Technology to Avoid Overexposure
Minimum Illumination	0.33 Lux @ F1.8 (Color) 0.001 Lux @ F1.8 (B/W)
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)
IR Illuminators	Built-in IR illuminators, effective up to 20 meters IR LED*4 with Smart IR Technology
On-board Storage	MicroSD/SDHC/SDXC card slot
Video	
Compression	H.264, MJPEG
Maximum Frame Rate	H.264: 20 fps @ 2048x1536 30 fps @ 1920x1080 MJPEG: 20 fps @ 2048x1536 30 fps @ 1920x1080
Maximum Streams	3 simultaneous streams
S/N Ratio	Above 62 dB
Dynamic Range	100 dB
Video Streaming	Adjustable resolution, quality and bitrate
Image Settings	Adjustable image size, quality and bit rate Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, Scheduled profile settings 3D Noise Reduction, Smart Stream Seamless recording, new text on video, SD recording 1HR
Audio	
Audio Capability	Audio input/output (full duplex)
Compression	AAC, G.711, G.726
Interface	External microphone input and Output
Network	
Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X
Interface	10Base-T/100 BaseTX Ethernet (RJ-45)

ONVIF	Supported, specification available at www.onvif.org
Intelligent Video	
Video Motion Detection	Triple-window video motion detection
Alarm and Event	
Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection
Alarm Events	Event notification using HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
General	
Smart Focus System	Remote focus
Connectors	RJ-45 for Network/PoE connection Audio input Audio output AC 24V power input DC 12V power input Digital input*1 Digital output*1
LED Indicator	System power and status indicator
Power Input	DC 12V AC 24V IEEE 802.3af PoE Class 3
Power Consumption	DC: Max. 25.2 W (Heater on), 11 W (Heater off) AC: Max. 26.25 W (Heater on), 12.5 W (Heater off) PoE: Max. 11 W
Dimensions	Ø: 173 mm x 115 mm
Weight	Net: 1,240g
Casing	Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing
Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL
Operating Temperature	Starting Temperature: -40°C ~ 50°C (PoE: -10°C ~ 50°C) Working Temperature: -50°C ~ 50°C (PoE: -20°C ~ 50°C)
Warranty	36 months
System Requirements	
Operating System	Microsoft Windows 7/Vista/XP/2000
Web Browser	Mozilla Firefox 7~10 (Streaming only) Internet Explorer 7/8/9/10
Other Players	VLC: 1.1.11 or above QuickTime: 7 or above
Included Accessories	
CD	User's manual, quick installation guide, Installation Wizard 2, free ST7501 32-channel VMS
Others	Quick installation guide, warranty card, alignment sticker, desiccant bag, waterproof connector

Dimensions

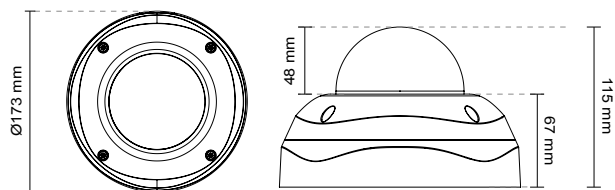

Compatible Accessories

Mounting Kits



AM-215
L Shape Bracket



AM-712
Conduit Box

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455532
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
T: +31(0)36-5298-434
E: sales europe@vivotek.com

Ver. 4